


EnerGalactic-3000

EnerGalactic-1650

昆宇电源
COSPOWERS

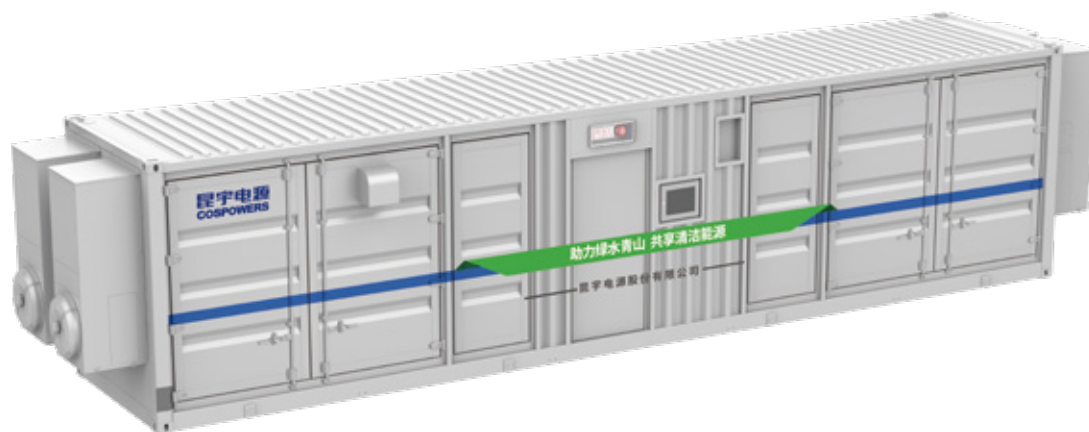

全舱温差
<5°C



三级消防
高安全性



高能量密度
灵活布置及扩容



模块化预制
无需现场安装

	参数/型号	EnerGalactic-3000	EnerGalactic-1650
电池模块	电芯容量	100Ah	60Ah
	模块成组	3P14S	2P20S
	模块标称电压	44.8V	64V
	模块能量	13.440kWh	7.680kWh
	尺寸 (W*D*H)	295*689*361mm	290*685*277mm
电池簇	模块数量	16pcs	12pcs
	电池簇标称电压	716.8V	768.0V
	电压范围	627.2~795.2V	672.0~852.0V
	单簇能量	215.040kWh	92.160kWh
	电池架尺寸 (W*D*H)	1200*702*2350mm	900*671*2230mm
电池舱	电池簇数量	14pcs	18pcs
	电池系统电量	3.011MWh	1.659MWh
	电池舱尺寸	40尺	40尺
	冷却方式	风冷	风冷
	防护等级	IP54	IP54



昆宇电源股份有限公司

网址: WWW.COSPOWERS.COM

地址: 山东省东营市东营区东七路28号


电话: 0546-7768891

版权及最终解释权归昆宇电源股份有限公司所有

EnerGalactic-3000

EnerGalactic-1650

COSPOWERS

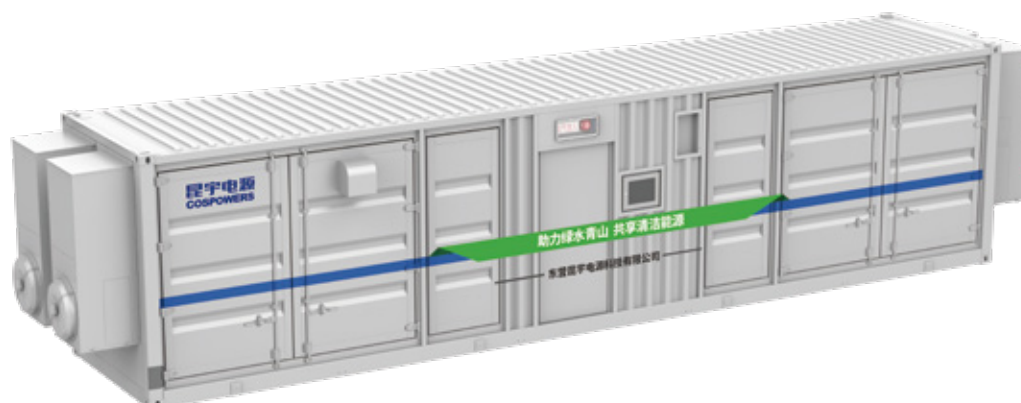

Temperature Difference
inside the Battery
Pack: <math><5^{\circ}\text{C}</math>



High Safety Fire
Protection at the
Pack Level



High Energy Density
for Flexible Layout
and Expansion



Modular Prefabrication
No On-site Installation
Required

Parameters/ Model		EnerGalactic-3000	EnerGalactic-1650
Battery Module	Cell Capacity	100Ah	60Ah
	Battery Pack	3P14S	2P20S
	Module Voltage	44.8V	64V
	Module Power	13.440kWh	7.680kWh
	Size	295*689*361mm	290*685*277mm
Battery Cluster	NOs.of Modules	16pcs	12pcs
	Cluster Nominal Voltage	716.8V	768.0V
	Voltage Range	627.2~795.2V	672.0~852.0V
	Single Cluster Power	215.040kWh	92.160kWh
	Battery Rack Dimension	1200*702*2350mm	900*671*2230mm
Battery Cabin	Nos. of Battery Clusters	14pcs	18pcs
	Battery system energy	3.011MWh	1.659MWh
	Battery Cabin Dimension	40尺	40尺
	Cooling Method	风冷	风冷
	IP Class	IP54	IP54



Cospowers Technology Co., Ltd.

W: WWW.COSPOWERS.COM

A: No.28, Dongqi Road, Dongying City, Shandong Province, P.R.C.

T: +86-546-7768891

Copyright and final interpretation rights belong to Cospowers Technology Co., Ltd.